

BUCKETS PLUS

Manufactured using highly robust 2 mm sheet metal. Lower due to its inside handle.

Side unloading lever entails fewer risks. Hatches opened using pinions.


Designed for pouring concrete mixes using lifting equipment.

PT

■ C



central unloading

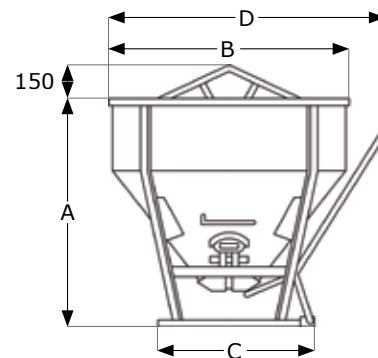

COMPONENT	L (max.)	kg (max.)	WEIGHT (kg)	REFERENCE
CENTRAL UNLOADING BUCKET PLUS C 150 L	150	390	45	010411504
CENTRAL UNLOADING BUCKET PLUS C 200 L	200	520	50	010412004
CENTRAL UNLOADING BUCKET PLUS C 800 L	800	2080	140	010418004
CENTRAL UNLOADING BUCKET PLUS C 1000 L	1000	2600	160	010419994

A	B	C	D
540	920	750	1050
620	920	750	1050
1120	1250	750	1450
1300	1250	750	1450


■ CL



Side and central unloading

tile side foldable

- Side and central unloading using foldable side tile (Side and central unloading)

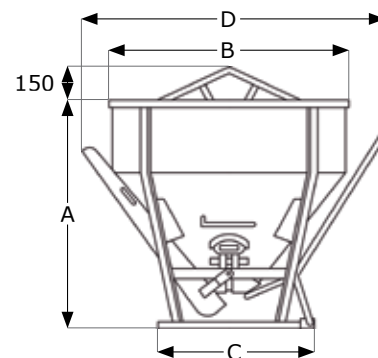

COMPONENT	L (max.)	kg (max.)	WEIGHT (kg)	REFERENCE
SIDE AND CENTRAL UNLOADING BUCKET PLUS CL 150 L	150	390	60	010421504
SIDE AND CENTRAL UNLOADING BUCKET PLUS CL 200 L	200	520	65	010422004
SIDE AND CENTRAL UNLOADING BUCKET PLUS CL 350 L	350	910	80	010423494
SIDE AND CENTRAL UNLOADING BUCKET PLUS CL 500 L	500	1300	97	010424994
SIDE AND CENTRAL UNLOADING BUCKET PLUS CL 800 L	800	2080	150	010428004
SIDE AND CENTRAL UNLOADING BUCKET PLUS CL 1000 L	1000	2600	170	010429994


A	B	C	D
560	920	660	1100
640	920	660	1100
880	920	660	1100
950	1050	660	1250
1120	1250	750	1550
1300	1250	750	1550

■ CT



rubber hose

- Central unloading using side lever, with a rope that allows unloading from a safe distance.
- Automatic closure regulator.
- Rubber for concrete: Ø 200 mm. Length: 2 m
- Ideal for structural framework and pillars.

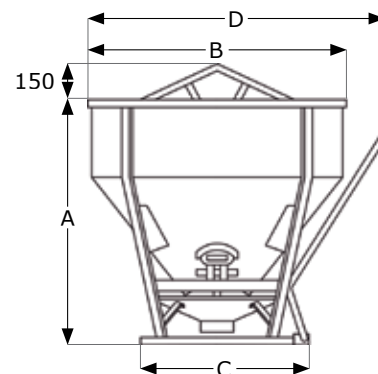

COMPONENT	L (max.)	kg (max.)	WEIGHT (kg)	REFERENCE
BUCKET PLUS W/RUBBER HOSE CT 500 L	500	1300	120	010440501
BUCKET PLUS W/RUBBER HOSE CT 1000 L	1000	2600	215	010441001
BUCKET PLUS W/RUBBER HOSE CT 1500 L	1500	3900	245	010441501

A	B	C	D
1250	1050	880	1200
1670	1250	930	1450
2180	1250	930	1450

BUCKETS PLUS

Manufactured using highly robust 2mm sheet metal. This item has an automatic closure regulator. Central unloading using side lever, with a rope that allows unloading from a safe distance. Rubber for concrete, greater unloading precision. (ø200 mm/Length: 2 m).


PT

■ BCE



rubber hose

- Hatches opened using pinions, greater unloading precision.
- Foldable support.
- Ideal for filling pillars and areas with difficult access.

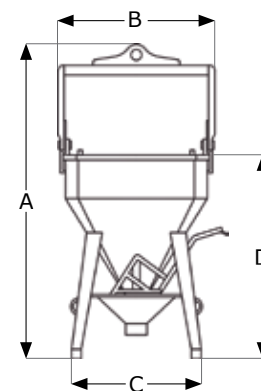

COMPONENT	L (max.)	kg (max.)	WEIGHT (kg)	REFERENCE
BUCKET PLUS W/RUBBER HOSE BCE 500 L	500	1300	215	010435001
BUCKET PLUS W/RUBBER HOSE BCE 1000 L	1000	2600	320	010435011
BUCKET PLUS W/RUBBER HOSE BCE 1500 L	1500	3900	405	010435021
RUBBER HOSE D-200 BCE (2 m)	-	-	4	010435101
CLAMP FOR RUBBER HOSE	-	-	1	010435200


A	B	C	D
2387	1128	1000	1505
2807	1447	1200	1712
3048	1647	1300	1925

■ BCF



conical

- The equipment has various profiles that allows for loading when it is laid flat on the floor.
- Once the bucket is lifted up by its articulated handle, it is automatically placed in the vertical position.

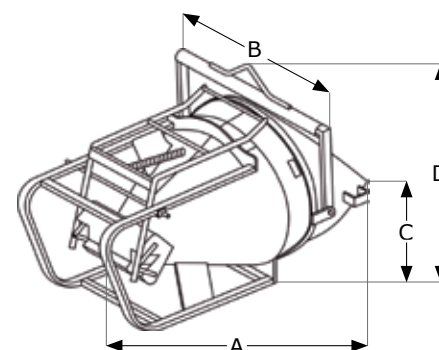

COMPONENT	L (max.)	kg (max.)	WEIGHT (kg)	REFERENCE
LAYDOWN BUCKET PLUS BCF 500 L	500	1300	275	010455051
LAYDOWN BUCKET PLUS BCF 1000 L	1000	2600	351	010455101
LAYDOWN BUCKET PLUS BCF 1500 L	1500	3900	690	010455151


A	B	C	D
2098	1269	643	1512
2569	1529	786	1806
2781	1884	974	2033

■ BC+



rubber hose

- The equipment has various profiles that allows for loading when it is laid flat on the floor.
- Once the bucket has been lifted up using its U-shaped articulated handle, it is automatically placed in a vertical position.

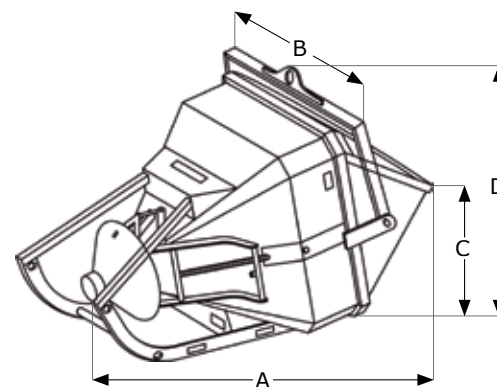

COMPONENT	L (max.)	kg (max.)	WEIGHT (kg)	REFERENCE
BUCKET PLUS W/RUBBER HOSE BC+ 500 L	500	1300	255	010450051
BUCKET PLUS W/RUBBER HOSE BC+ 1000 L	1000	2600	365	010450101
BUCKET PLUS W/RUBBER HOSE BC+ 1500 L	1500	3900	450	010450151

A	B	C	D
2100	890	680	1100
2700	1500	800	1350
3000	1700	1180	1600


BUCKETS DCM

Buckets manufactured using highly robust 1.5 mm sheet metal. Upper and interior U-shaped reinforcements. Lower unloading compartments opened using lifting handle welded to the outside. PT

VF



central unloading

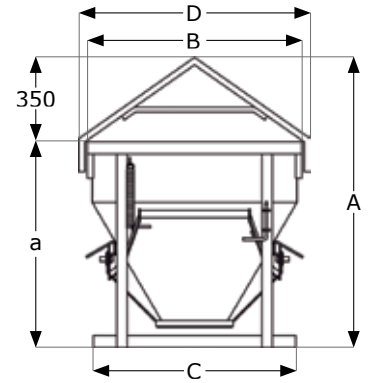

COMPONENT	L (max.)	kg (max.)	WEIGHT (kg)	REFERENCE
CENTRAL UNLOADING BUCKET DCM VF 250 L	250	550	64	010412505
CENTRAL UNLOADING BUCKET DCM VF 300 L	300	660	69	010413005
CENTRAL UNLOADING BUCKET DCM VF 350 L	350	770	70	010413505
CENTRAL UNLOADING BUCKET DCM VF 500 L	500	1100	77	010415005

a	A	B	C	D
850	1200	890	840	958
960	1310	890	840	958
990	1340	1000	970	1055
1110	1460	1000	970	1055


DV



Side and central unloading

tile side foldable

- Side and central unloading using foldable side tile (Side and central unloading)

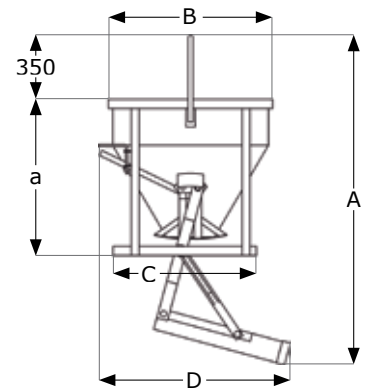

COMPONENT	L (max.)	kg (max.)	WEIGHT (kg)	REFERENCE
SIDE AND CENTRAL UNLOADING BUCKET DCM DV 250 L	250	550	70	010422505
SIDE AND CENTRAL UNLOADING BUCKET DCM DV 300 L	300	660	77	010423005
SIDE AND CENTRAL UNLOADING BUCKET DCM DV 350 L	350	770	79	010423505
SIDE AND CENTRAL UNLOADING BUCKET DCM DV 500 L	500	1100	85	010425005


a	A	B	C	D
850	1770	890	840	1040
960	1920	890	840	1040
990	1960	1000	970	1040
1110	2100	1000	970	1040

CIRCULAR MUCK SKIPS



anti-turn

- Manufactured using reinforced 1.5 mm metal sheet in upper and lower parts with 30 x 6 mm gussets.
- With an articulated tipper handle with anti-turn lock on lateral axes.
- Incorporates lifting lugs.



COMPONENT	L (max.)	kg (max.)	WEIGHT (kg)	REFERENCE
CIRCULAR MUCK SKIP 65 L	65	150	17.5	010430655
CIRCULAR MUCK SKIP 100 L	100	230	20.5	010431005
CIRCULAR MUCK SKIP 150 L	150	345	25.5	010431505

A	B	C
530	280	385
530	280	515
530	310	770