

WHEELBARROWS

The wheelbarrows are designed to be propelled by a single person.

With a single front wheel, the weight of the load is distributed between the wheel and the operator.


For other wheelbarrow models, please consult the factory. See DACAME Lifting range.

PT

CR




65 L



CA



90 L

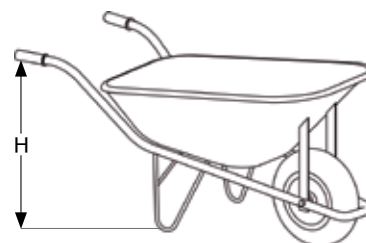

COMPONENT	l (max.)	WEIGHT (kg)	REFERENCE
WHEELBARROW CR 65 RED (pneumatic wheel)	65	12.5	010300654
WHEELBARROW CA 90 YELLOW (pneumatic wheel)	90	13	010300901



A	B	C	D	H
825	585	175	225	680
940	550	220	250	680

LIFTING WHEELBARROWS



See DACAME Lifting Range

COMPONENT	l (max.)	kg (max.)	WEIGHT (kg)	REFERENCE
E1 CEMENT CART 1 PU Foam Wheel E1 100 l	100	210	23	010200019
E3 CEMENT CART 2 PU Foam Wheels E3 100 l	100	250	21	010200029
R3 CEMENT CART 2 PU Foam Wheels R3 125 l	125	275	29	010200059
K1 CEMENT CART 2 PU K1 90 l	90	210	33	010200065
L1 BRICK CART 3 PU Pneumatic Wheels L1	-	400	40.5	010300045



## WHEELBARROWS

## PU FOAM WHEELS


## RPE

with  
axle

CR




CA

E1<sup>1</sup>

COMPONENT	WEIGHT (kg)	REFERENCE
PU FOAM WHEEL WITH AXLE RPE-220	2.8	010200622
PU FOAM WHEEL WITH AXLE RPE-245	2.9	010200624

Ø	Ø AXLE	L
350	18	220
350	18	245

## RP

E3<sup>1</sup>R3<sup>1</sup>L1<sup>1</sup>

COMPONENT	WEIGHT (kg)	REFERENCE
PU FOAM WHEEL NO AXLE RP	2.5	010200600

Ø	Ø INT	L
350	22	75

## REINFORCED WHEELS


## RRE

with  
axle4  
liners

CR



CA


E1<sup>1</sup>

COMPONENT	WEIGHT (kg)	REFERENCE
PNEUMATIC WHEEL 4L. WITH AXLE RRE-245	2.8	010200520

Ø	Ø AXLE	L
370	18	245

## CART WHEEL K1

## RK

K1<sup>1</sup>

COMPONENT	WEIGHT (kg)	REFERENCE
PNEUMATIC WHEEL RK	4.8	010200546

Ø	Ø INT	L
565	26	54

**CEMENT CARTS**


**■ SQM**



wheel  
RSM



- Designed for the transport and handling of cement bags, boxes, etc.
- The vertical grating ensures good cargo securing.
- It has two plastic handles for an easy handling.




**■ SQN**



wheel  
RSN



- Ø32x1.5
- Ø25x1.5
- t: 3

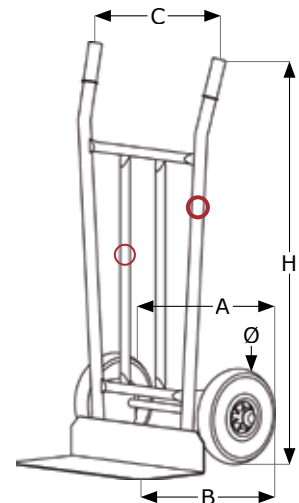

COMPONENT	kg (max.)	WEIGHT (kg)	REFERENCE
CEMENT CART SQ-M (solid wheel)	60	11.5	010300025
CEMENT CART SQ-N (pneumatic wheel)	60	11.5	010300035

A	B	C	H	Ø
560	435	520	1040	200
560	495	520	1070	260


**■ CEMENT CART WHEELS**

**RSM**



solid

SQM



COMPONENT	WEIGHT (kg)	REFERENCE
CEMENT CART SOLID WHEEL RSM	1.4	010200561


Ø	Ø int	L
200	20	57

**RSN**



pneu-  
matic

SQN



COMPONENT	WEIGHT (kg)	REFERENCE
CEMENT CART PNEUMATIC WHEEL RSN	1	010200560

Ø	Ø int	L
260	21	75